

## DESCRIPTION



- The Harmonys Line enables you to connect to an induction loop amplifier or a 100V audio amplifier.
- Indoor installation, near induction equipment or 100V audio amplifier.
- 3 Operating modes:
  - Broadcast of melodies stored in the product. Control by Sigma master clock (the Ethernet network) or by manual command from the control box (ex: SEP alarm).
  - Voice calls: from microphone or sent from the computer.
  - Broadcast of streaming audio and/or music from the computer.
- Product settings are accomplished via the embedded web.

## COMPLIANCE

- Directives: LVD 2014/35/EU, EMC 2014/30/EU, RoHS 2011/65/EU.

## TECHNICAL FEATURES

- **Test**..... 1 button on front and rear panel.
- **Power supply indicator**..... 1 LED on front and rear panel.
  - Led ON (green) = device powered on.
  - Led OFF = no power.
- **Network indicator**..... 1 LED on front and rear panel.
  - Led flashing green quickly = connection to the network in progress.
  - Led flashing green slowly = device connected to the network.
  - Led flashing red slowly = loss of network connection or failure to connect to the network.
- **Out**..... Professional line level - Stereo on 2 RCA jacks.
- **Relay control output**..... Dry contact (NC-C-NO). Maximum voltage: 125V AC. Maximum current: 0.5A. Pluggable terminal block 3-Pin. Control of the amplifier power supply.
- **Nominal level (dBu)**..... +4 dBu (volume 8).
- **Nominal level (RMS)**..... 1,228 V<sub>RMS</sub>.
- **Max amplitude**..... 1,736 V<sub>pk</sub>.
- **Peak-to-Peak amplitude**..... 3,472 V<sub>pp</sub>.
- **Impedance @ 1 kHz**..... 600 Ω.
- **Supervision**..... SNMP v1 and v2c.

## MECHANICAL FEATURES

- **Construction**..... Aluminium case for 19" rack (height 1U).
- **Operating temperature range**..... 0° to +50°C.
- **Protection Index**..... IP31.
- **Weight**..... 0.5 kg.
- **Dimensions**..... See at the back.

## ELECTRICAL FEATURES


- **Power supply**..... PoE (Power over Ethernet).
- **Consumption max**..... 13 W.

## REFERENCE

- 907 741..... Harmonys Line Rack (*cables not included*).





## DIMENSIONS

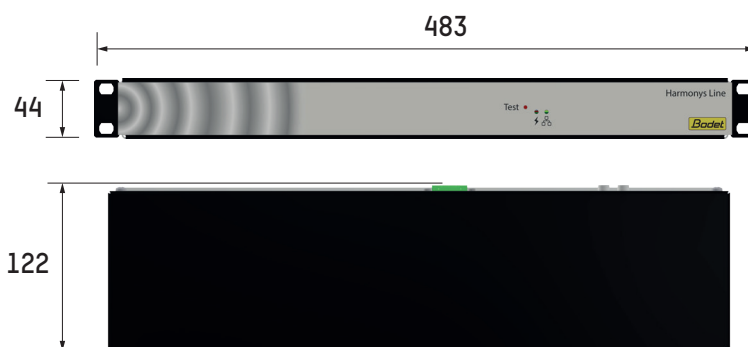


Dimensions in mm

## SYNOPTIC

### BODET AUDIO TRANSMISSION SYSTEM

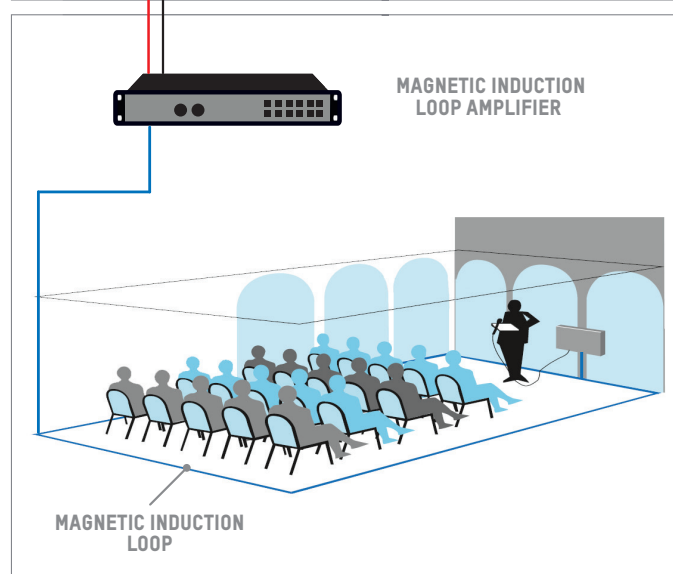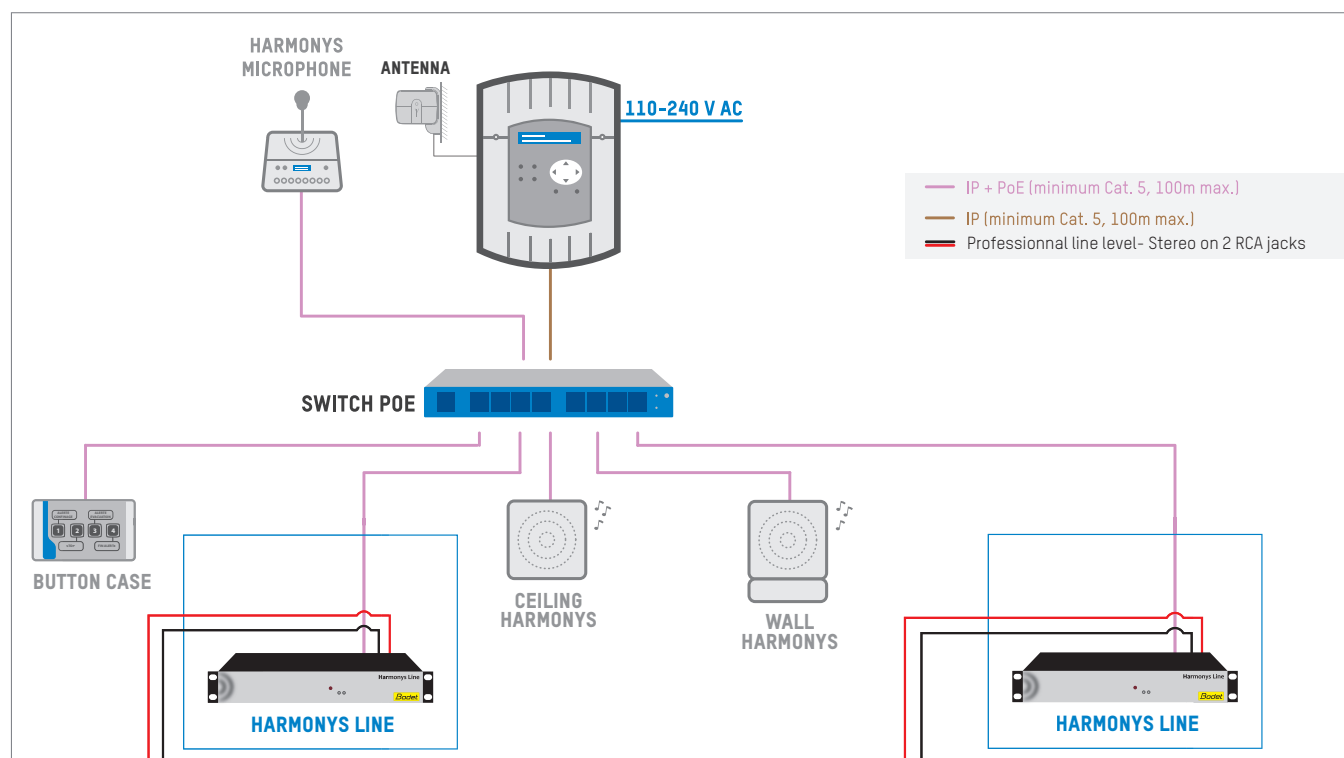

MAGNETIC LOOP TRANSMISSION SYSTEM  
(NOT INCLUDED)

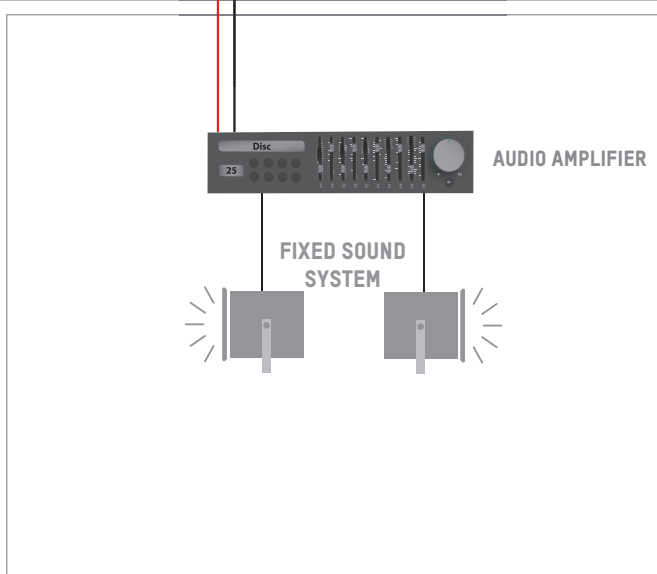

100V SOUND SYSTEM  
(NOT INCLUDED)